



- A. Input Characteristics:**
- 1) Voltage: 100-127VAC
 - 2) Frequency: 50/60 Hz.
 - 3) Line Current: 20A Maximum
 - 4) Load Capacity: 2.40 KVA
 - 5) Overload Protection: (1) 1P/20A UL489 Circuit Breaker
 - 6) Power Cord: 10' (3m), #12AWG/3C
 - 7) Connector: NEMA L5-20P
 - 8) Indicator: Power-on, LED

- B. Output Characteristics:**
- 1) Voltage: 100-127VAC
 - 2) Current: 20A (Total Combined Load)
 - 3) Outlets: 12X NEMA 5-20R


- C. Mechanical Characteristics:**
- 1) Material: CRS
 - 2) Finish: Powder Coat, Black, Fine Texture
 - 3) Lettering: Silk-Screen, White/Epoxy
 - 4) Storage Temp.: -(13) - 149F (-25 - 65C)

- D. Operating Environment:**
- 1) Temperature: 32 - 122F (0 - 50C)
 - 2) Relative Humidity: 0 - 95% (Non-Condensing)
 - 3) Elevation: 0 - 10,000FT (0 - 3000 m)

- E. Regulatory Conformance:**
- 1) Safety Agency: UL/cUL, UL60950-1, CE
 - 2) RoHS: Compliant to Directive 2002/95/EC

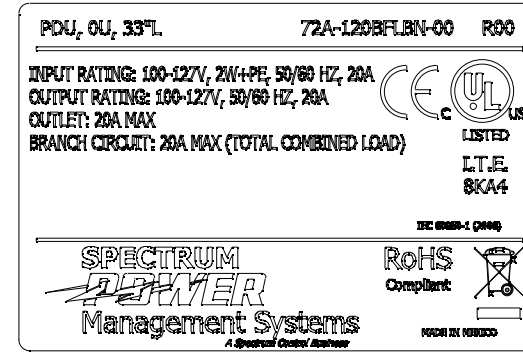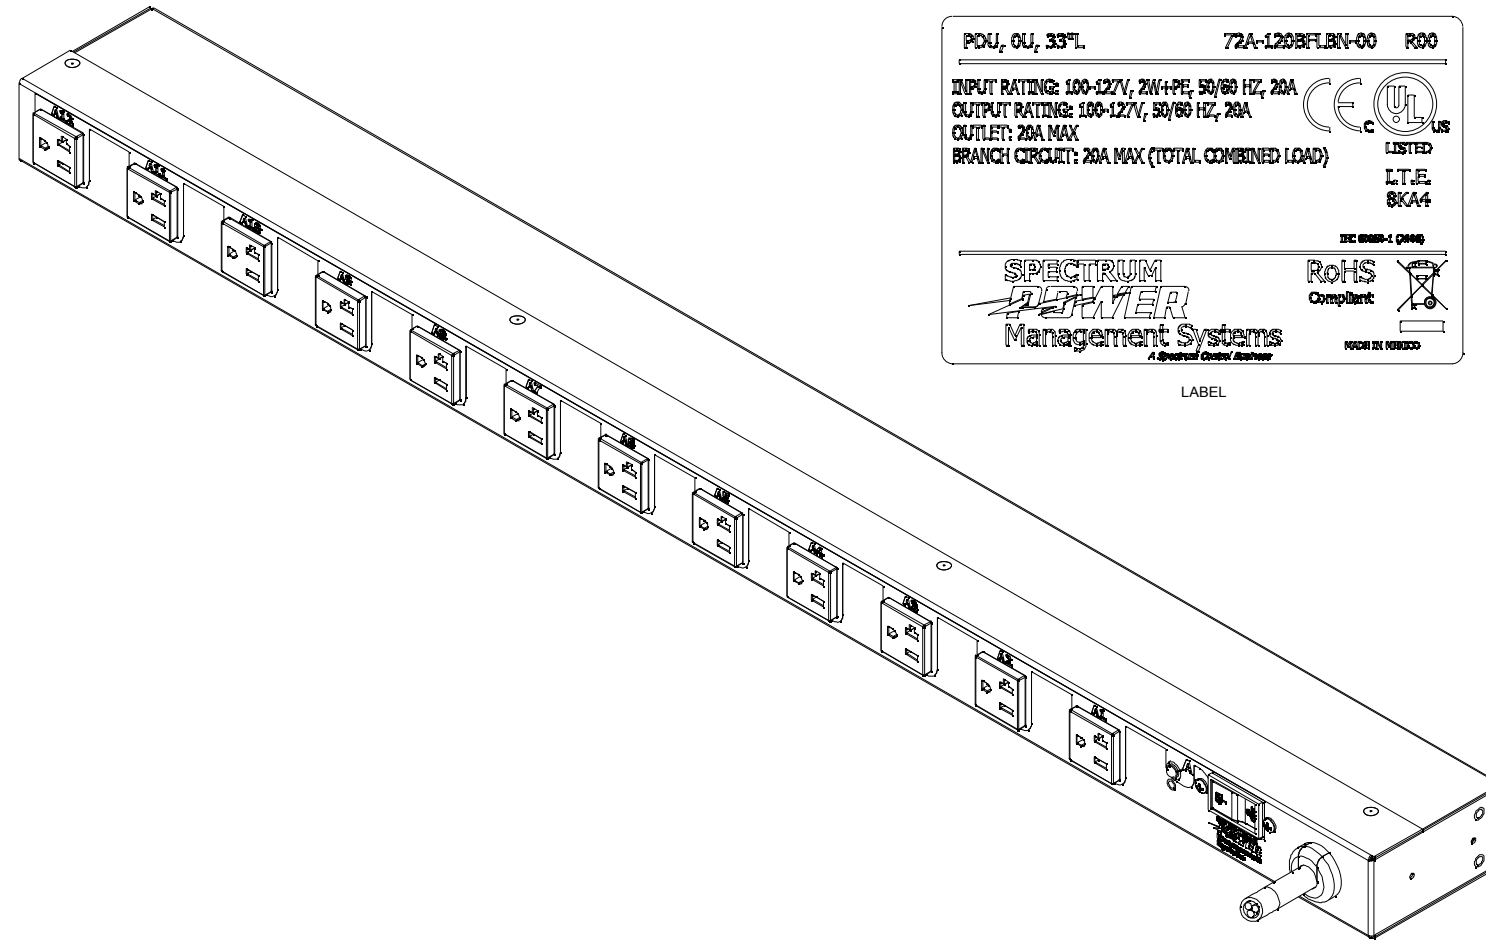



LABEL



L5-20P PLUG END



1.73 in [43.9 mm]

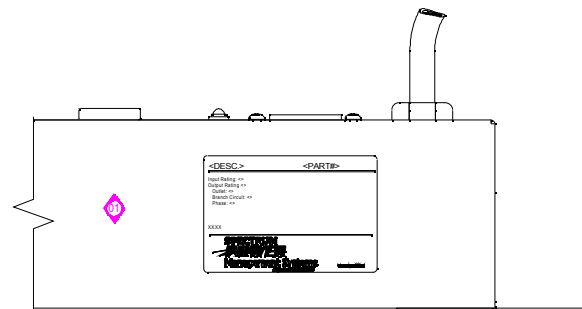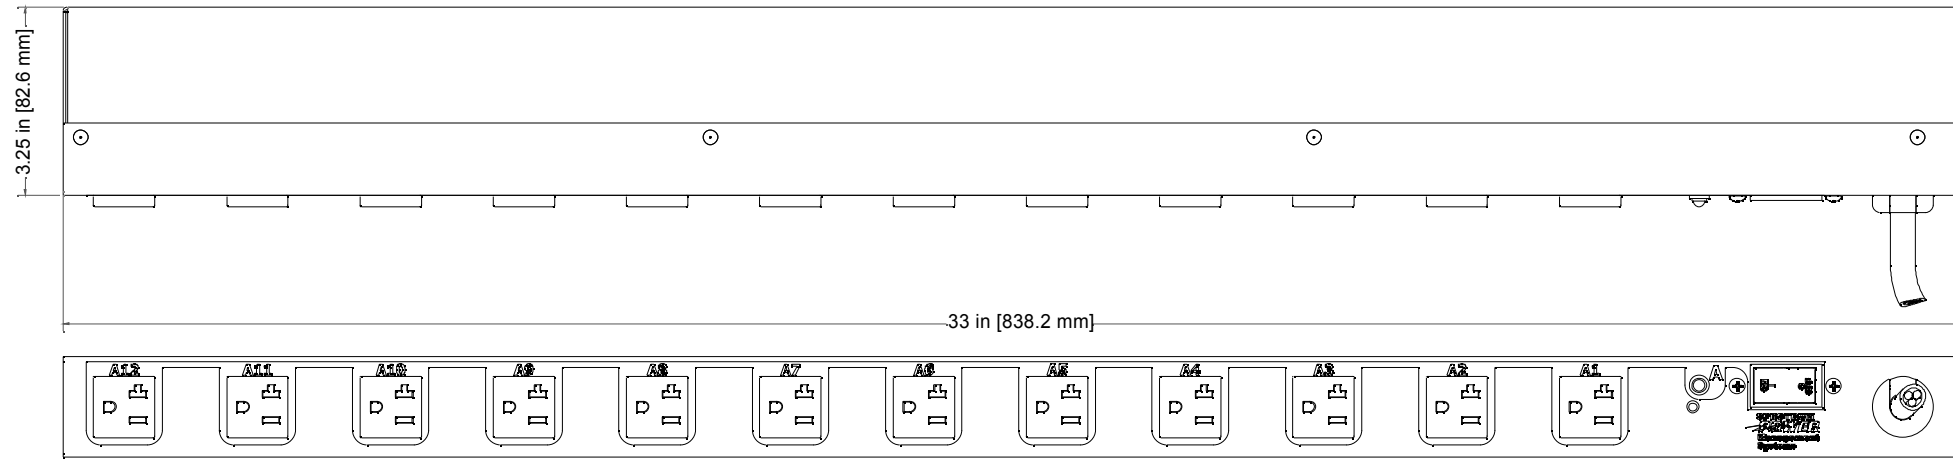

SIDE VIEW (LABEL PLACEMENT)

42204-ENG CHANGE NOTICE	DRAWINGS IN ACCORDANCE WITH STANDARD ANSI Y14.5M-1994		TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONS ±1/64 DECIMAL .XX ± .020 DECIMAL .XXX ± .010 ANGLES ± 0~30'		<p>12X 5-20R, 1 BREAKER, 0U PDU</p> <p>72A-120BFLBN-00</p>
	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS COPYRIGHTED. EXCEPT WITH THE WRITTEN PERMISSION OF SPECTRUM CONTROL, INC. OR ITS SUBSIDIARIES, SUCH INFORMATION SHALL NOT BE PUBLISHED OR DISCLOSED TO OTHERS, OR USED FOR ANY PURPOSE AND THIS DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.		THIRD ANGLE PROJECTION		
DRAWN: CarrS	DATE 2/22/2008	SHEET: 1 OF 1	CODE IDENT NO:	STATE COLLEGE, PENNSYLVANIA	