


- A. Input Characteristics:**
- 1) Voltage: 100-127VAC
 - 2) Frequency: 50/60 Hz.
 - 3) Line Current: 20A Maximum
 - 4) Load Capacity: 2.40 KVA
 - 5) Overload Protection: (1) 1P/20A UL489 Circuit Breaker
 - 6) Power Cord: 10' (3m), #12AWG/3C
 - 7) Connector: NEMA L5-20P
 - 8) Indicator: Power-on, LED

- B. Output Characteristics:**
- 1) Voltage: 100-127VAC
 - 2) Current: 20A (Total Combined Load)
 - 3) Outlets: 22X NEMA 5-20R


- C. Mechanical Characteristics:**
- 1) Material: CRS
 - 2) Finish: Powder Coat, Black, Fine Texture
 - 3) Lettering: Silk-Screen, White/Epoxy
 - 4) Storage Temp.: -(13) - 149F (-25 - 65C)

- D. Operating Environment:**
- 1) Temperature: 32 - 122F (0 - 50C)
 - 2) Relative Humidity: 0 - 95% (Non-Condensing)
 - 3) Elevation: 0 - 10,000FT (0 - 3000 m)

- E. Regulatory Conformance:**
- 1) Safety Agency: UL/cUL, UL60950-1, CE
 - 2) RoHS: Compliant to Directive 2002/95/EC



L5-20P PLUG END

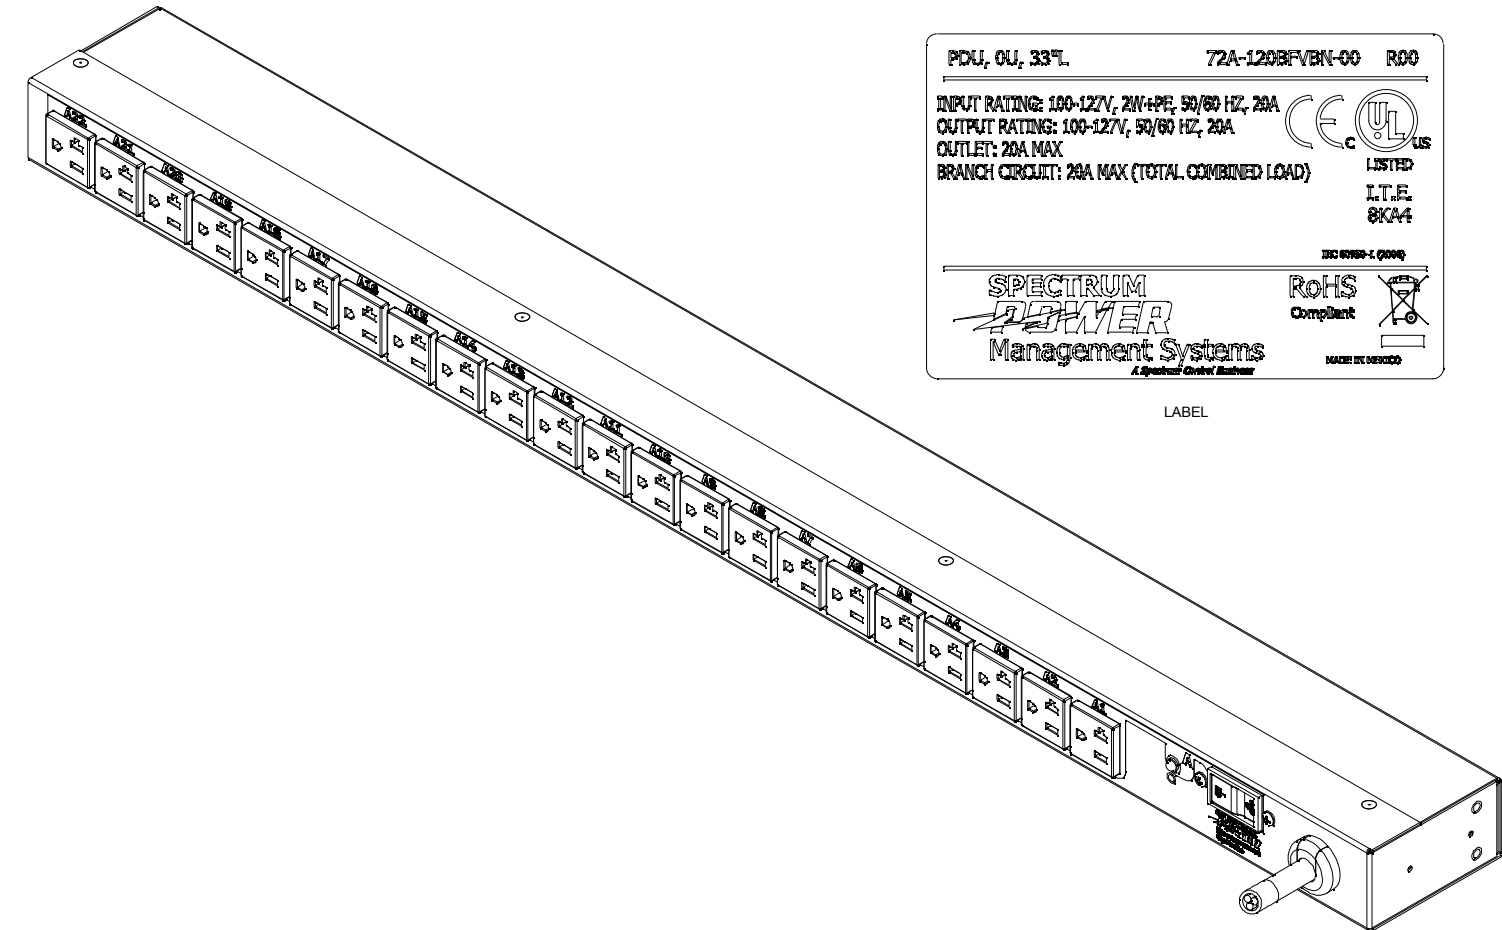

PDU, 0U, 33" L 72A-120BFVBN-00 R00

INPUT RATING: 100-127V, 2W+PE, 50/60 HZ, 20A
 OUTPUT RATING: 100-127V, 50/60 HZ, 20A
 OUTLET: 20A MAX
 BRANCH CIRCUIT: 20A MAX (TOTAL COMBINED LOAD)





UL LISTED I.T.E. 8KVA

SPECTRUM POWER Management Systems

ROHS Compliant

MADE IN MEXICO

LABEL

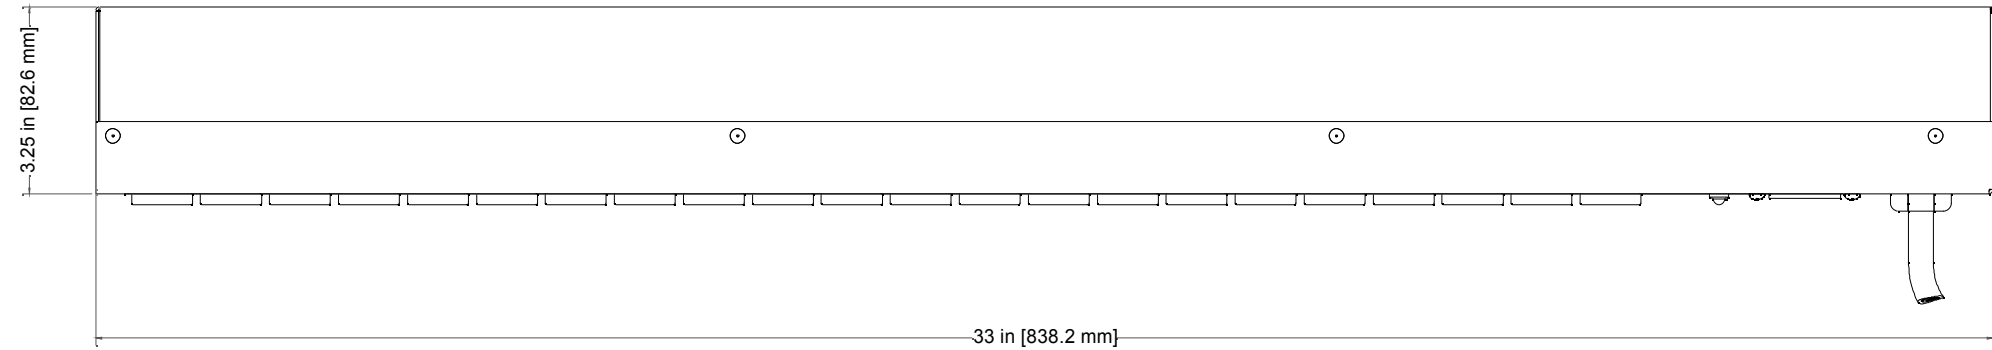

40243-ENG CHANGE NOTICE	DRAWINGS IN ACCORDANCE WITH STANDARD ANSI Y14.5M-1994 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS COPYRIGHTED. EXCEPT WITH THE WRITTEN PERMISSION OF SPECTRUM CONTROL, INC. OR ITS SUBSIDIARIES, SUCH INFORMATION SHALL NOT BE PUBLISHED OR DISCLOSED TO OTHERS, OR USED FOR ANY PURPOSE AND THIS DOCUMENT IS NOT TO BE DUPLICATED IN WHOLE OR IN PART.	TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONS ±1/64 DECIMAL .XX ± .020 DECIMAL .XXX ± 0.010 ANGLES ± 0-30° HIRSD ANGLE PROJECTION		
			22X 5-20R, 1 BREAKER, 0U PDU	
			72A-120BFVBN-00	
			SHEET: 1 OF 1	CODE IDENT NO: