

A. Input Characteristics:


- 1) Voltage: (100-127)/(200-250)VAC
- 2) Frequency: 50/60 Hz.
- 3) Line Current: 20A Maximum
- 4) Load Capacity: 2.30/4.60 KVA
- 5) Overload Protection: (1) 2P/20A UL489 Circuit Breaker
- 6) Power Cord: 10' (3m), #12AWG/3C
- 7) Connector: NEMA L6-20P
- 8) Indicator: Power-on, LED

B. Output Characteristics:

- 1) Voltage: (100/127)/(200-250)VAC
- 2) Current: 20A (Total Combined Load)
- 3) Outlets: 24X IEC C13

C. Mechanical Characteristics:

- 1) Material: CRS
- 2) Finish: Powder Coat, Black, Fine Texture
- 3) Lettering: Silk-Screen, White/Epoxy
- 4) Storage Temp.: -(13) - 149F (-25 - 65C)



C20 INLET

D. Operating Environment:





- 1) Temperature: 32 - 122F (0 - 50C)
- 2) Relative Humidity: 0 - 95% (Non-Condensing)
- 3) Elevation: 0 - 10,000FT (0 - 3000 m)

E. Regulatory Conformance:

- 1) Safety Agency: UL/cUL, UL60950-1, CE
- 2) RoHS: Compliant to Directive 2002/95/EC



1.73 in [43.9 mm]

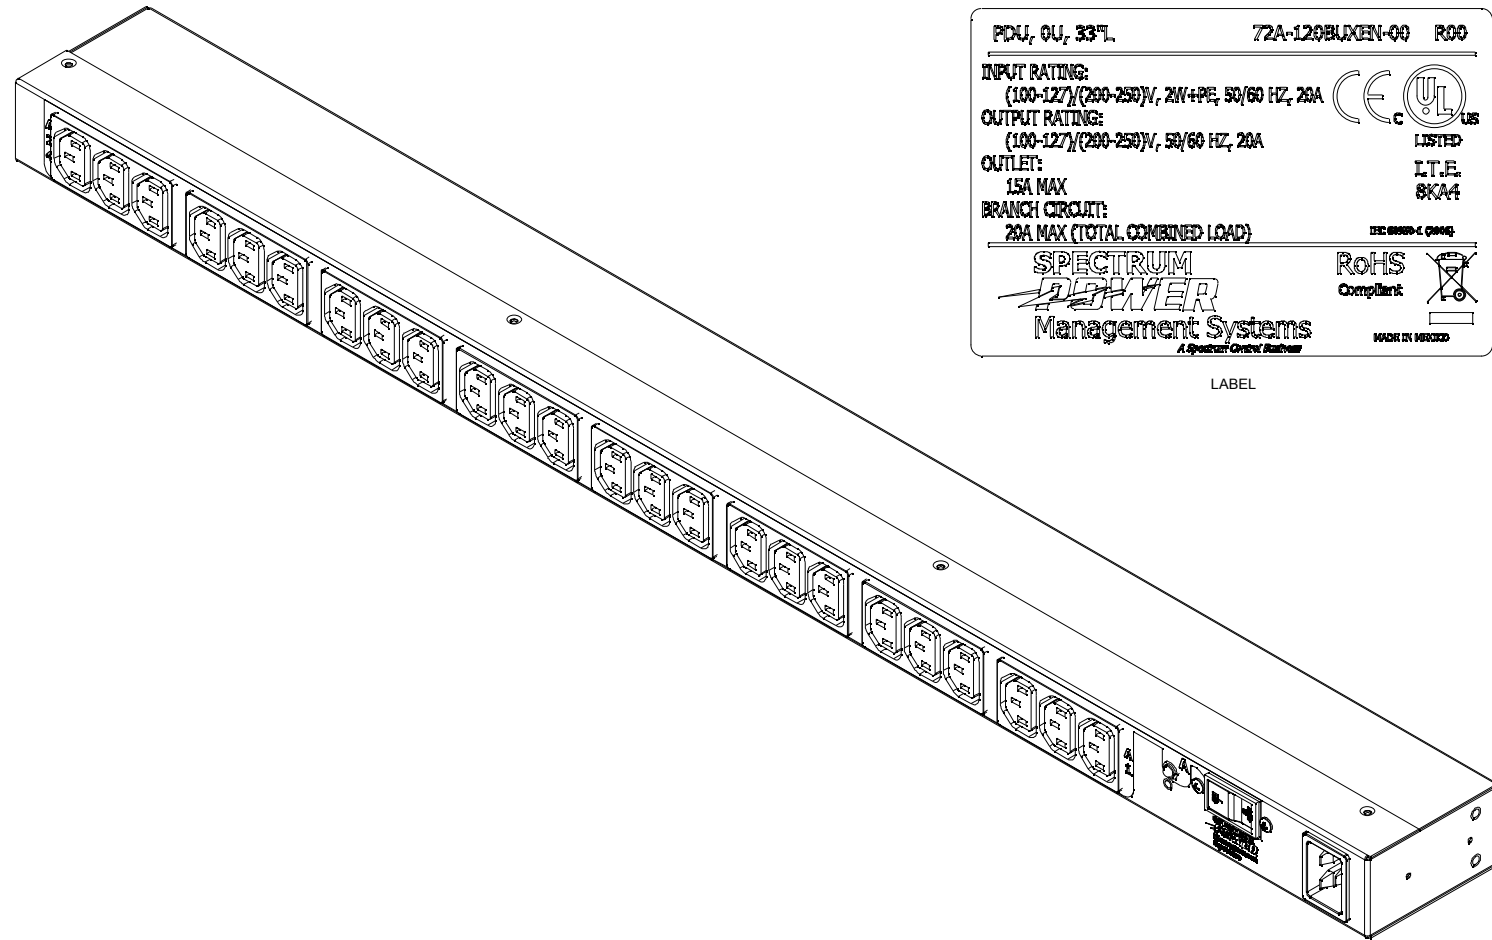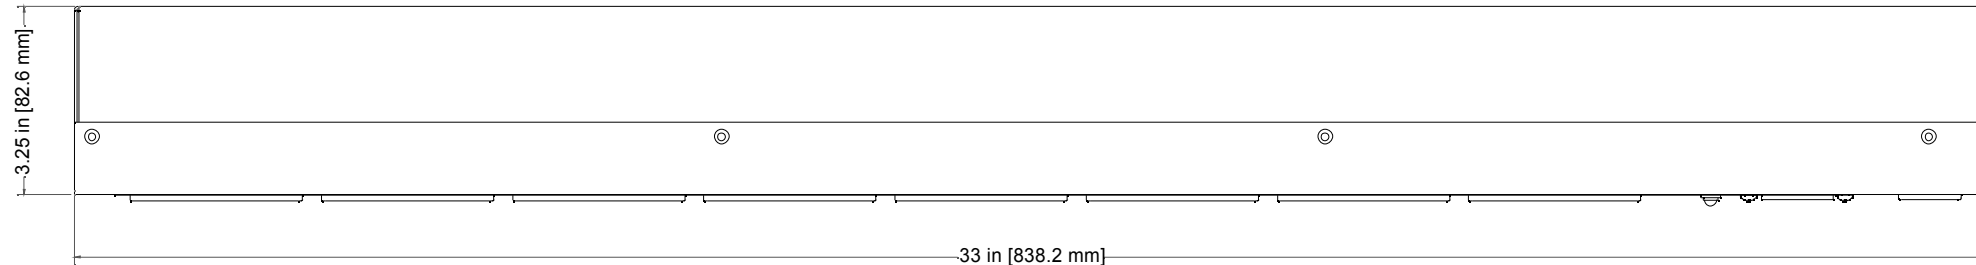


PDU, 0U, 33". 72A-120BUXEN-00 R00
INPUT RATING:
 (100-127)/(200-250)V, 2W+PE, 50/60 HZ, 20A
OUTPUT RATING:
 (100-127)/(200-250)V, 50/60 HZ, 20A
OUTLET:
 15A MAX
BRANCH CIRCUIT:
 20A MAX (TOTAL COMBINED LOAD)

LISTED
 I.T.E.
 8KA4
 RoHS Compliant
 MADE IN MEXICO

SPECTRUM POWER
 Management Systems
 A Spectrum Control System

LABEL

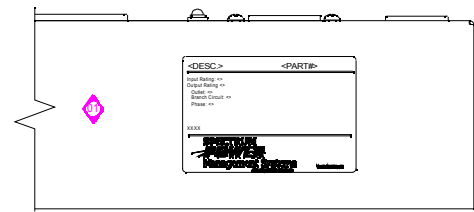

SIDE VIEW (LABEL PLACEMENT)

42204-ENG CHANGE NOTICE 1	DRAWINGS IN ACCORDANCE WITH STANDARD ANSI Y14.5M-1994 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS COPYRIGHTED. EXCEPT WITH THE WRITTEN PERMISSION OF SPECTRUM CONTROL, INC. OR ITS SUBSIDIARIES, SUCH INFORMATION SHALL NOT BE PUBLISHED OR DISCLOSED TO OTHERS, OR USED FOR ANY PURPOSE AND THIS DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.		TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONS ±1/64 DECIMAL .XX ± .020 DECIMAL .XXX ± .010 ANGLES ± 0~30'		<p>24X C13, 1 BREAKER, 0U PDU</p> <p>72A-120BUXEN-00</p>	
	DRAWN: CarrS		DATE 2/22/2008			
	CODE IDENT NO:		STATE COLLEGE, PENNSYLVANIA			