

A. Input Characteristics:

- 1) Voltage: 100-127VAC
- 2) Frequency: 50/60 Hz.
- 3) Line Current: 30A Maximum
- 4) Load Capacity: 3.60 KVA
- 5) Overload Protection: (2) 1P/15A UL489 Circuit Breaker
- 6) Power Cord: 10' (3m), #10AWG/3C
- 7) Connector: NEMA L5-30P
- 8) Indicators: Power-on, LED

B. Output Characteristics:

- 1) Voltage: 100-127VAC
- 2) Current: 30A (Total Combined Load)
- 3) Outlets: 2x 6 NEMA 5-20R

C. Mechanical Characteristics:


- 1) Material: CRS
- 2) Finish: Powder Coat, Black, Fine Texture
- 3) Lettering: Silk-Screen, White/Epoxy
- 4) Storage Temp.: -(13) - 149F (-25 - 65C)

D. Operating Environment:



- 1) Temperature: 32 - 122F (0 - 50C)
- 2) Relative Humidity: 0 - 95% (Non-Condensing)
- 3) Elevation: 0 - 10,000FT (0 - 3000 m)

E. Regulatory Conformance:





- 1) Safety Agency: UL/cUL, UL60950-1, CE
- 2) RoHS: Compliant to Directive 2002/95/EC



L5-30P PLUG END

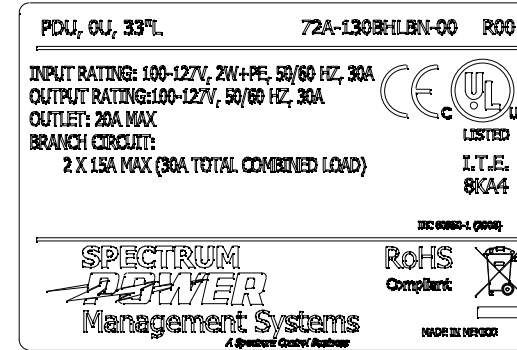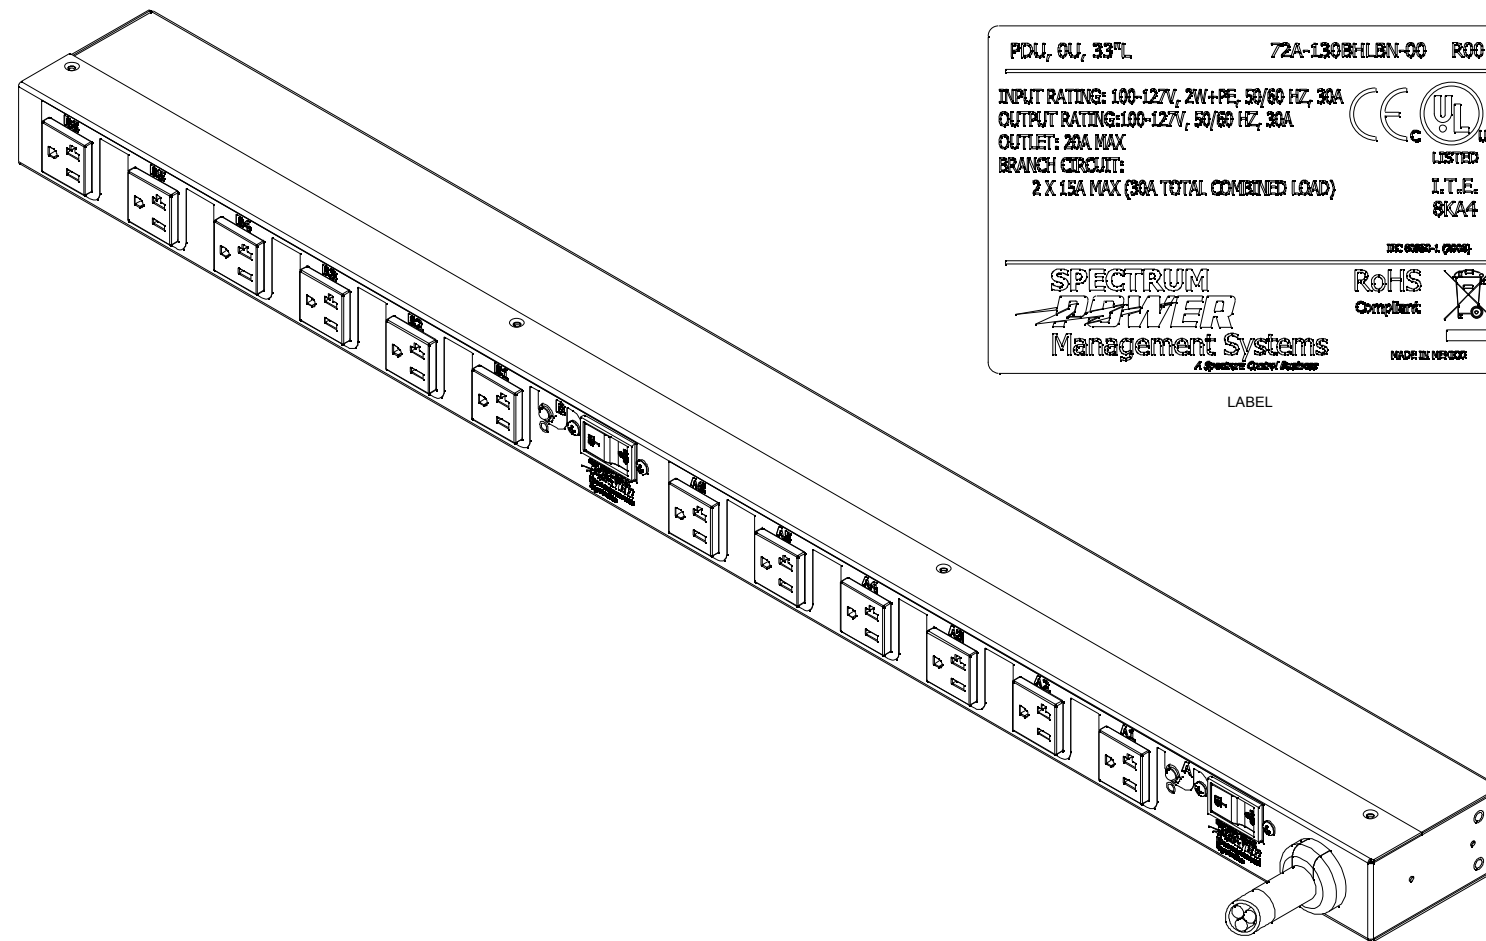

LABEL

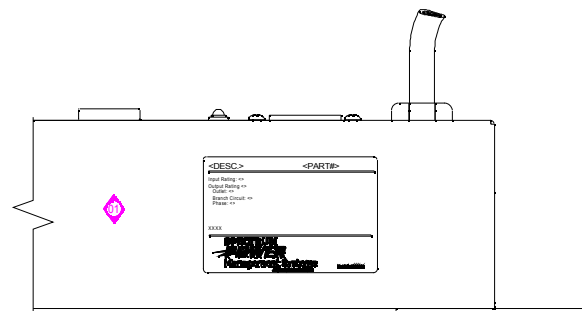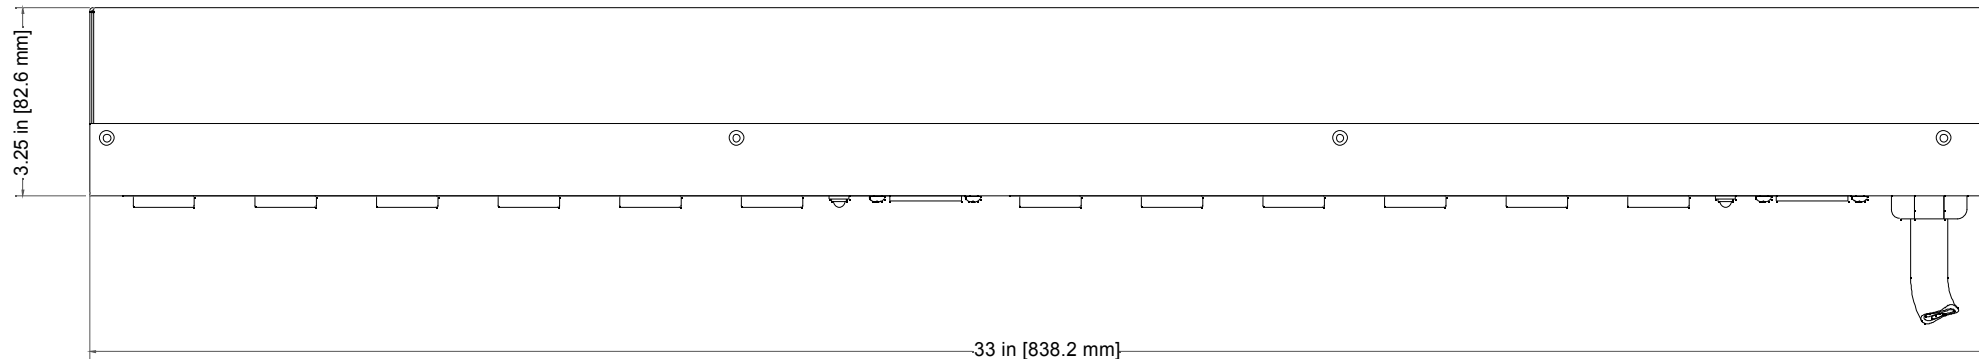

SIDE VIEW (LABEL PLACEMENT)

42204-ENG CHANGE NOTICE	DRAWINGS IN ACCORDANCE WITH STANDARD ANSI Y14.5M-1994		TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONS ±1/64 DECIMAL .XX ± .020 DECIMAL .XXX ± .010 ANGLES ± 0~30'		<p>12X 5-20R, DUAL BANK, 0U PDU</p> <p>72A-130BHLBN-00</p>
	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS COPYRIGHTED. EXCEPT WITH THE WRITTEN PERMISSION OF SPECTRUM CONTROL, INC. OR ITS SUBSIDIARIES, SUCH INFORMATION SHALL NOT BE PUBLISHED OR DISCLOSED TO OTHERS, OR USED FOR ANY PURPOSE AND THIS DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.		THIRD ANGLE PROJECTION		
DRAWN: CarrS	DATE 2/22/2008	SHEET: 1 OF 1	CODE IDENT NO:	STATE COLLEGE, PENNSYLVANIA	