

A. Input Characteristics:

- 1) Voltage: 200-250VAC
- 2) Frequency: 50/60 Hz.
- 3) Line Current: 30A Maximum
- 4) Load Capacity: 6.90 KVA
- 5) Overload Protection: (2) 2P/15A UL489 Circuit Breaker
- 6) Power Cord: 10' (3m), #10AWG/3C
- 7) Connector: NEMA L6-30P

B. Output Characteristics:

- 1) Voltage: 200-250VAC
- 2) Current: 30A (Total Connected Load)
- 3) Outlets: 2X (5-IEC C13, 1-IEC C19)

C. Mechanical Characteristics:


- 1) Material: CRS
- 2) Finish: Powder Coat, Black, Fine Texture
- 3) Lettering: Silk-Screen, White/Epoxy
- 4) Storage Temp.: -(13) - 149F (-25 - 65C)

D. Operating Environment:

- 1) Temperature: 32 - 122F (0 - 50C)
- 2) Relative Humidity: 0 - 95% (Non-Condensing)
- 3) Elevation: 0 - 10,000FT (0 - 3000 m)


E. Regulatory Conformance:

- 1) Safety Agency: UL/cUL, UL60950-1, CE
- 2) RoHS: Compliant to Directive 2002/95/EC

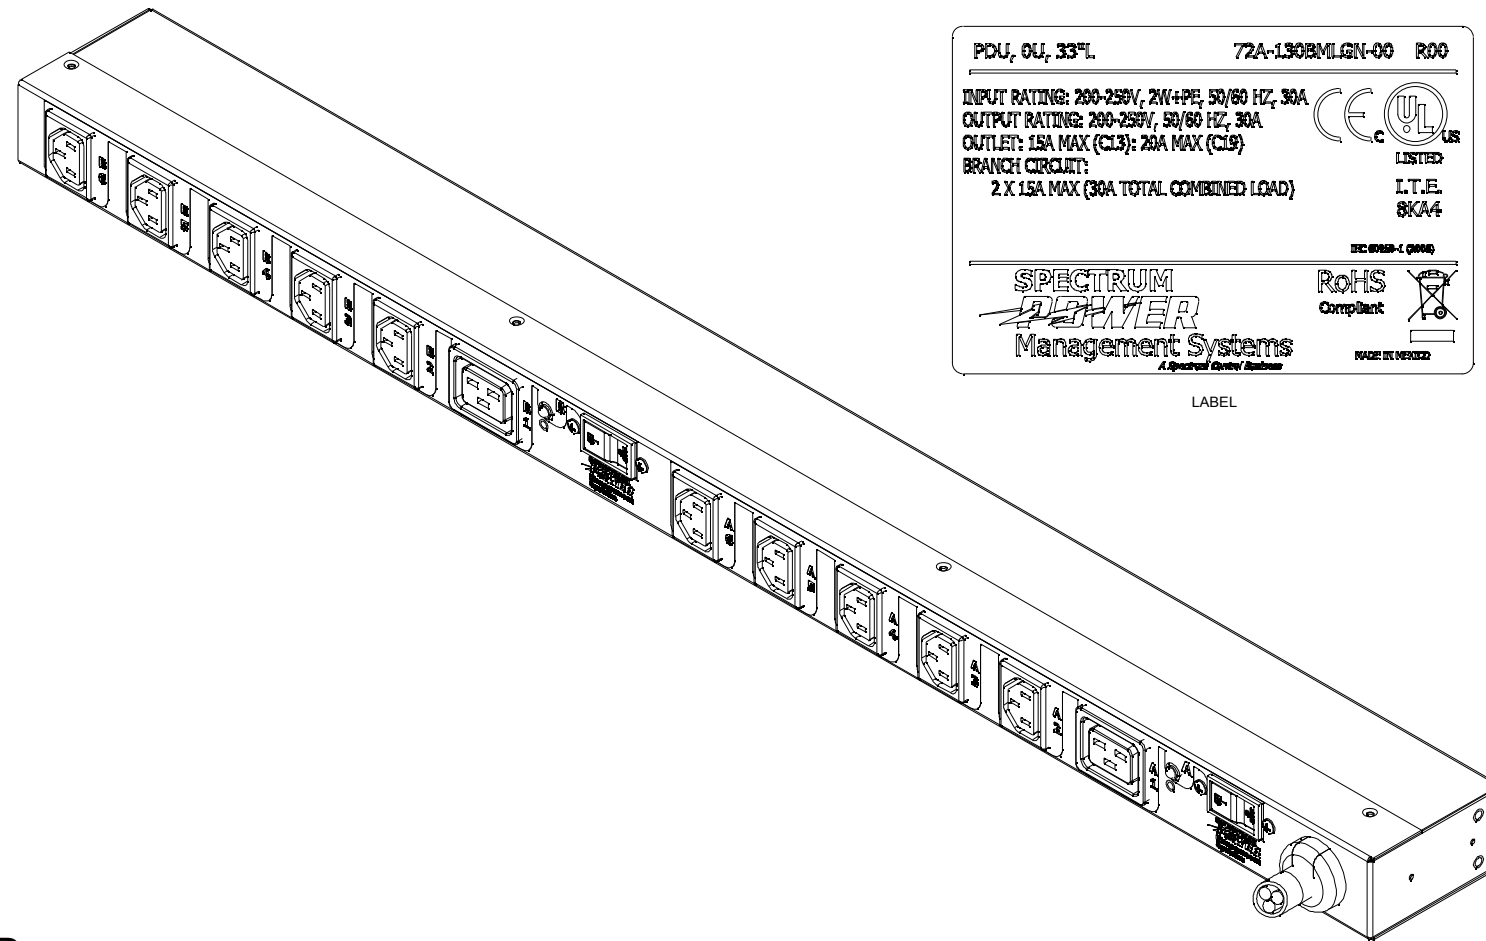


PDU, 0U, 33"L	72A-130BMLGN-00	R00
INPUT RATING: 200-250V, 2W+PE, 50/60 HZ, 30A OUTPUT RATING: 200-250V, 50/60 HZ, 30A OUTLET: 15A MAX (C13); 20A MAX (C19) BRANCH CIRCUIT: 2 X 15A MAX (30A TOTAL COMBINED LOAD)		
SPECTRUM POWER Management Systems <small>A Quality Control Business</small>		LISTED I.T.E. SCA4 IEC 60950-1 (2005) RoHS Compliant MADE IN MEXICO

LABEL



L6-30P PLUG END

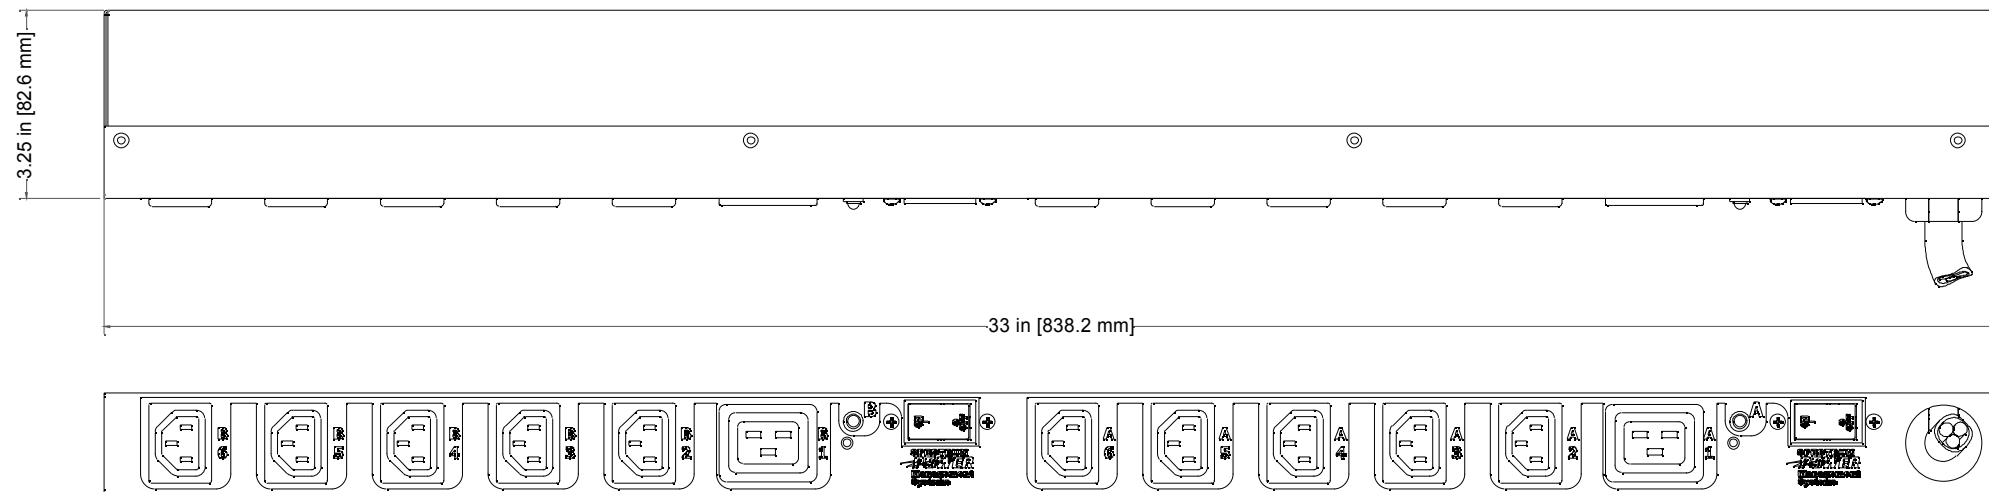

40243-ENG CHANGE NOTICE	DRAWINGS IN ACCORDANCE WITH STANDARD ANSI Y14.5M-1994 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS COPYRIGHTED. EXCEPT WITH THE WRITTEN PERMISSION OF SPECTRUM CONTROL, INC. OR ITS SUBSIDIARIES, SUCH INFORMATION SHALL NOT BE PUBLISHED OR DISCLOSED TO OTHERS, OR USED FOR ANY PURPOSE AND THIS DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.	TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONS ±1/64 DECIMAL .XX ± .020 DECIMAL .XXX ± .010 ANGLES ± 0~30'		
			10X C13, 2X C19, DUAL BANK, 0U PDU 72A-130BMLGN-00	
	DRAWN: CarrS	DATE 2/22/2008	SHEET: 1 OF 1	CODE IDENT NO: