




- A. Input Characteristics:**
- 1) Voltage: 200-250VAC
  - 2) Frequency: 50/60 Hz.
  - 3) Line Current: 30A Maximum
  - 4) Load Capacity: 6.90 KVA
  - 5) Overload Protection: (2) 2P/15A UL489 Circuit Breaker
  - 6) Power Cord: 10' (3m), #10AWG/3C
  - 7) Connector: NEMA L6-30P

- B. Output Characteristics:**
- 1) Voltage: 200-250VAC
  - 2) Current: 30A (Total Connected Load)
  - 3) Outlets: 2X (9-IEC C13, 1-IEC C19)



- C. Mechanical Characteristics:**
- 1) Material: CRS
  - 2) Finish: Powder Coat, Black, Fine Texture
  - 3) Lettering: Silk-Screen, White/Epoxy
  - 4) Storage Temp.: -(13) - 149F (-25 - 65C)

- D. Operating Environment:**
- 1) Temperature: 32 - 122F (0 - 50C)
  - 2) Relative Humidity: 0 - 95% (Non-Condensing)
  - 3) Elevation: 0 - 10,000FT (0 - 3000 m)

- E. Regulatory Conformance:**
- 1) Safety Agency: UL/cUL, UL60950-1, CE
  - 2) RoHS: Compliant to Directive 2002/95/EC

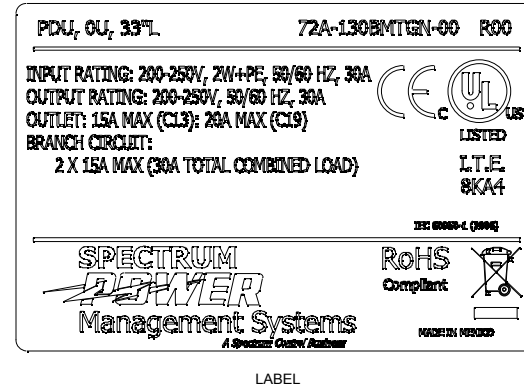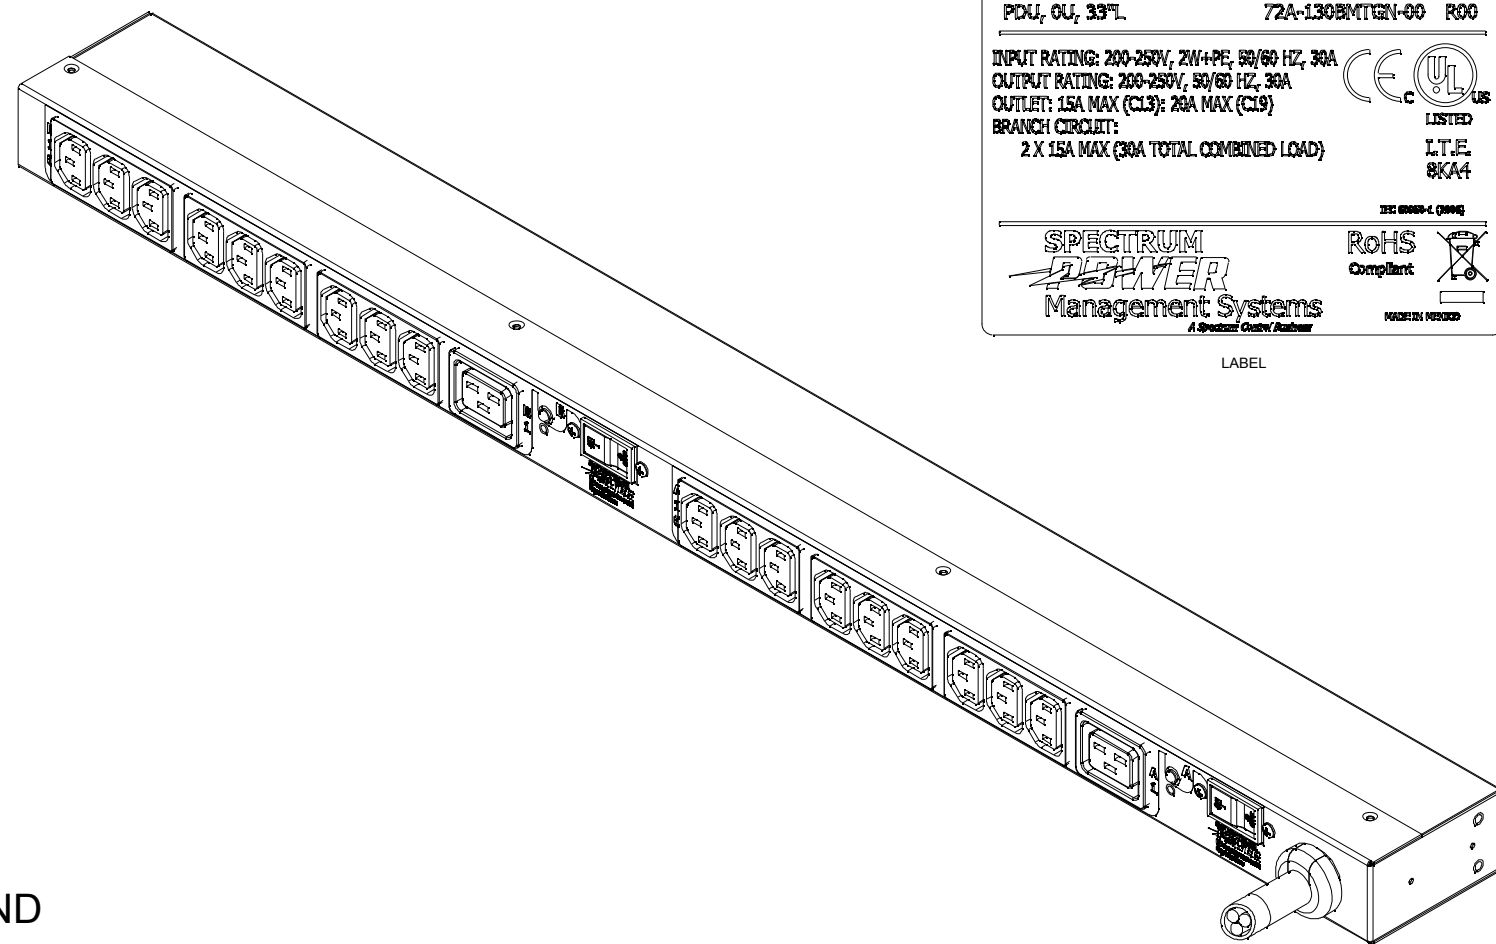

L6-30P PLUG END

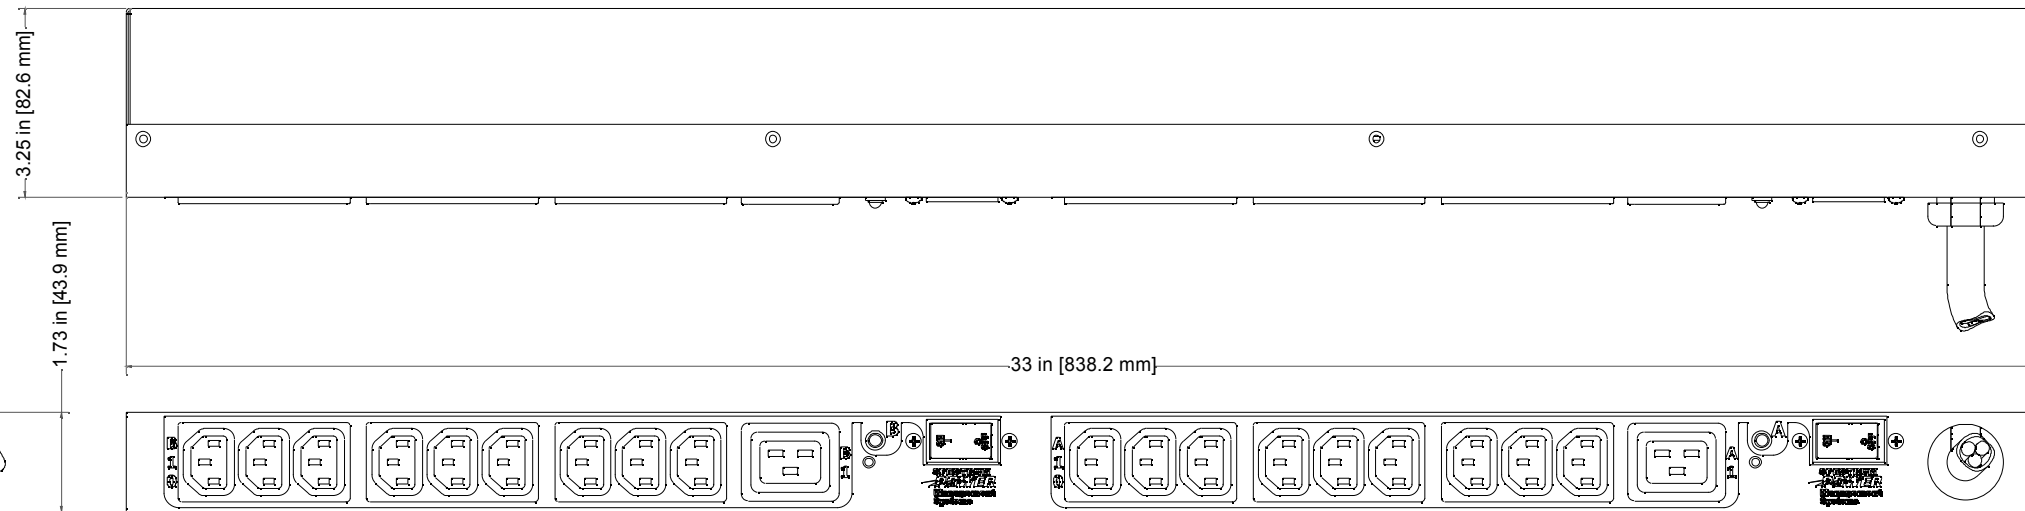

40243-ENG CHANGE NOTICE

DRAWINGS IN ACCORDANCE WITH STANDARD ANSI Y14.5M-1994  
 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS COPYRIGHTED. EXCEPT WITH THE WRITTEN PERMISSION OF SPECTRUM CONTROL, INC. OR ITS SUBSIDIARIES, SUCH INFORMATION SHALL NOT BE PUBLISHED OR DISCLOSED TO OTHERS, OR USED FOR ANY PURPOSE AND THIS DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.  
 TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 FRACTIONS ±1/64  
 DECIMAL .XX ± .020  
 DECIMAL .XXX ± .010  
 ANGLES ± 0~30'  
 THIRD ANGLE PROJECTION

**Spectrum POWER Management Systems**  
 18X C13, 2X C19, DUAL BANK, 0U PDU  
 72A-130BMTGN-00

|                 |                   |                  |                |                             |
|-----------------|-------------------|------------------|----------------|-----------------------------|
| DRAWN:<br>CarrS | DATE<br>2/22/2008 | SHEET:<br>1 OF 1 | CODE IDENT NO: | STATE COLLEGE, PENNSYLVANIA |
|-----------------|-------------------|------------------|----------------|-----------------------------|