

**A. Input Characteristics:**

- 1) Voltage: 200/250 VAC
- 2) Frequency: 50/60 Hz.
- 3) Current: 30A Maximum (24A Derated, N.A.)
- 4) Load Capacity: 6.90 KVA
- 5) Overload Protection: (2) 2P/15A UL489 Circuit Breaker
- 6) Power Cord: 10' (3m)
- 7) Connector: L6-30P

**B. Output Characteristics:**

- 1) Voltage: 200/250 VAC
- 2) Current: 24A (Total Combined Load)
- 3) Outlets: 18X IEC320 C13, 6x IEC320 C19

**C. Mechanical Characteristics:**






- 1) Material: CRS/G40 Galv. Coating
- 2) Finish: Powder Coat, Black, Fine Texture
- 3) Silk-Screen: White/Epoxy
- 4) Storage Temp.: -(13) - 149F (-25 - 65C)

**D. Operating Environment:**

- 1) Temperature: 32 - 122F (0 - 50C)
- 2) Relative Humidity: 0 - 95% (Non-Condensing)
- 3) Elevation: 0 - 10,000FT (0 - 3000 m)

**E. Regulatory Conformance:**

- 1) Safety Agency: UL/cUL, FCC 15 Class A, UL60950-1
- 2) RoHS: Compliant to Directive 2002/95/EC

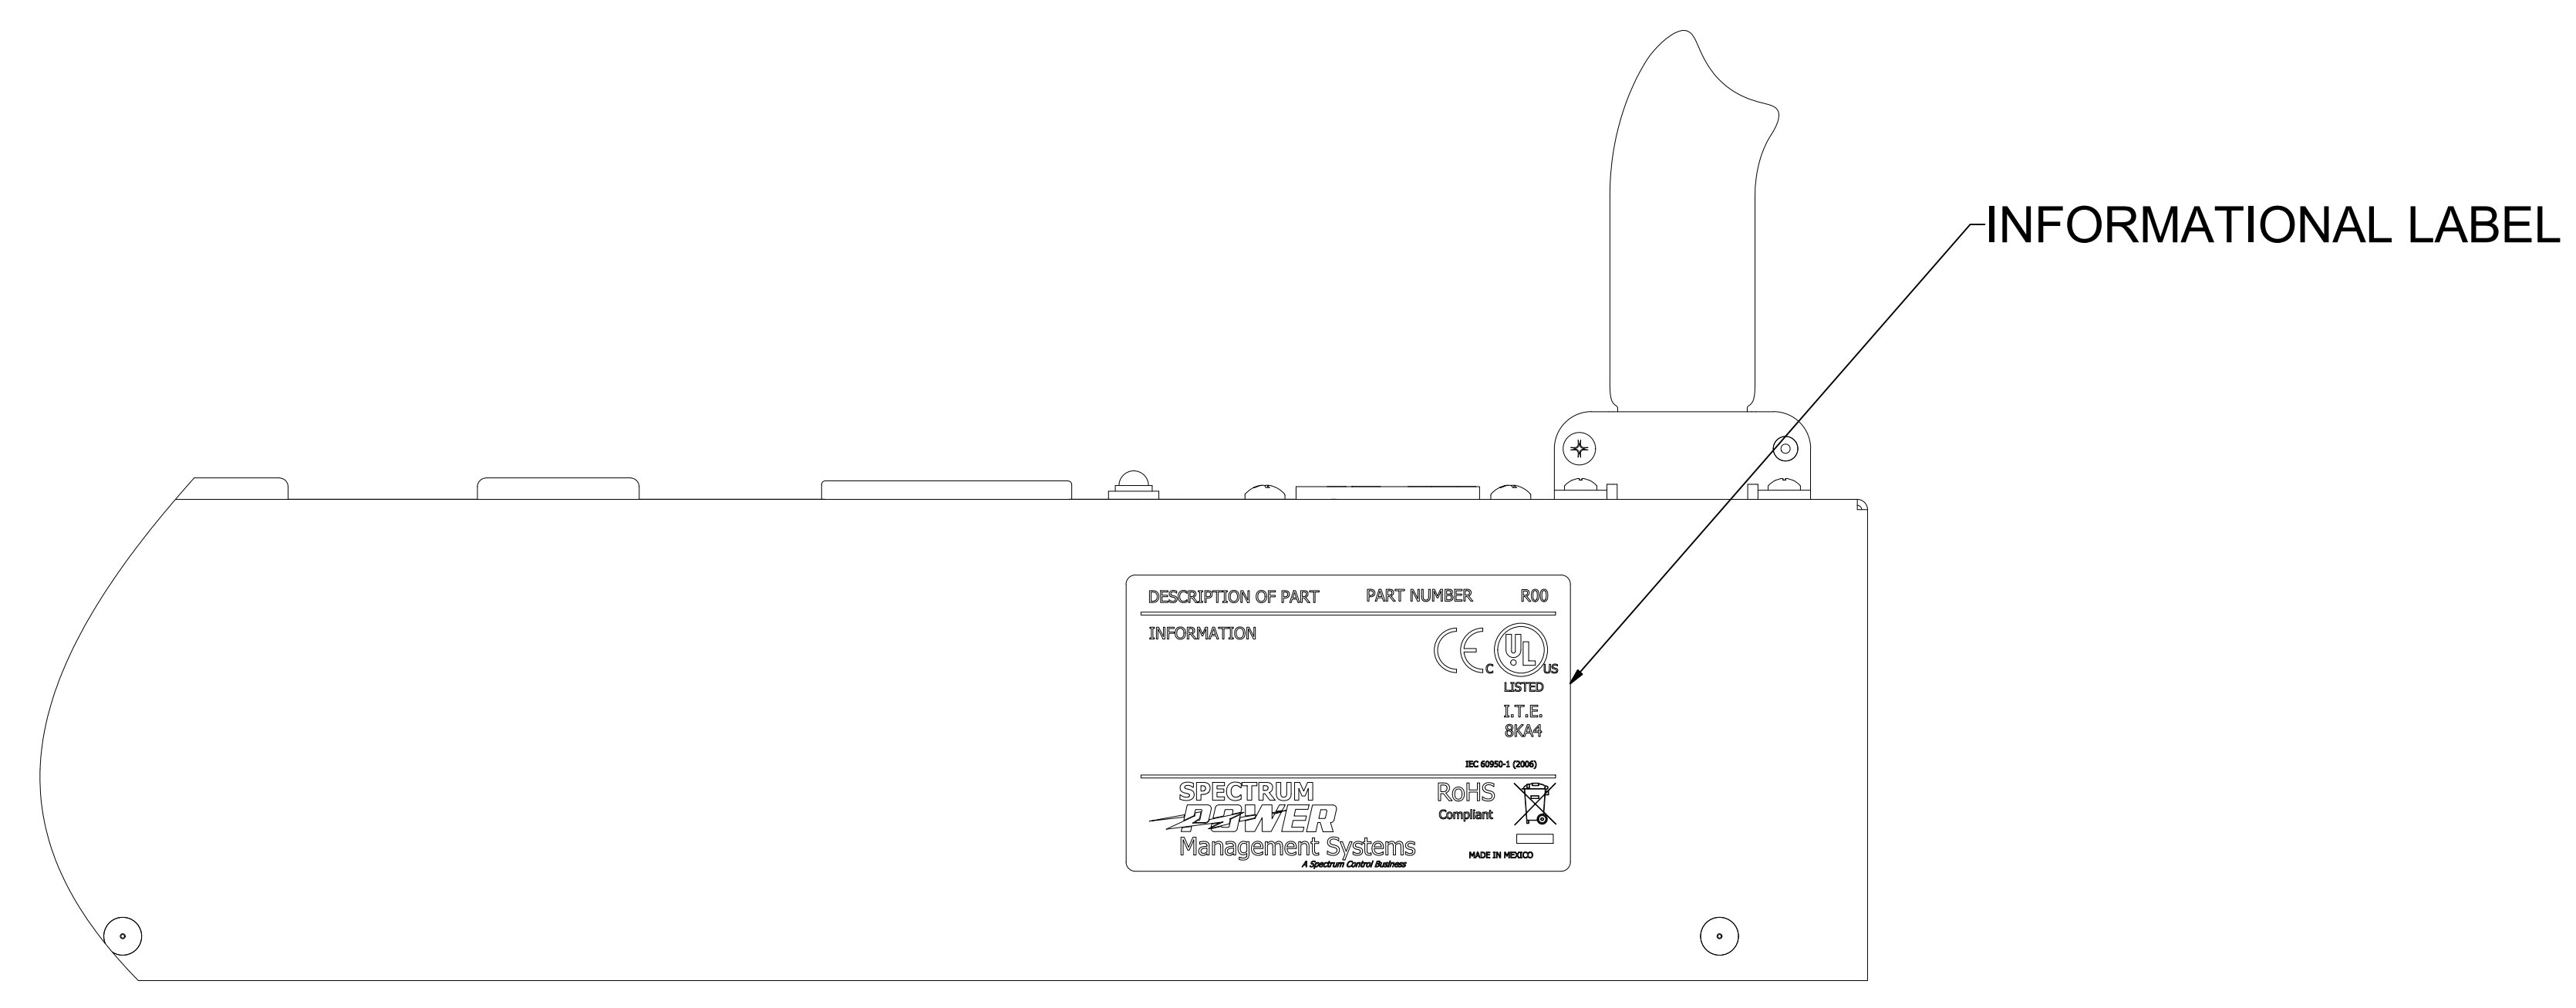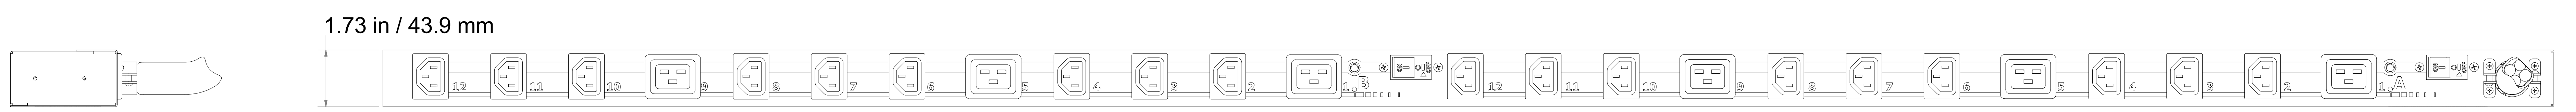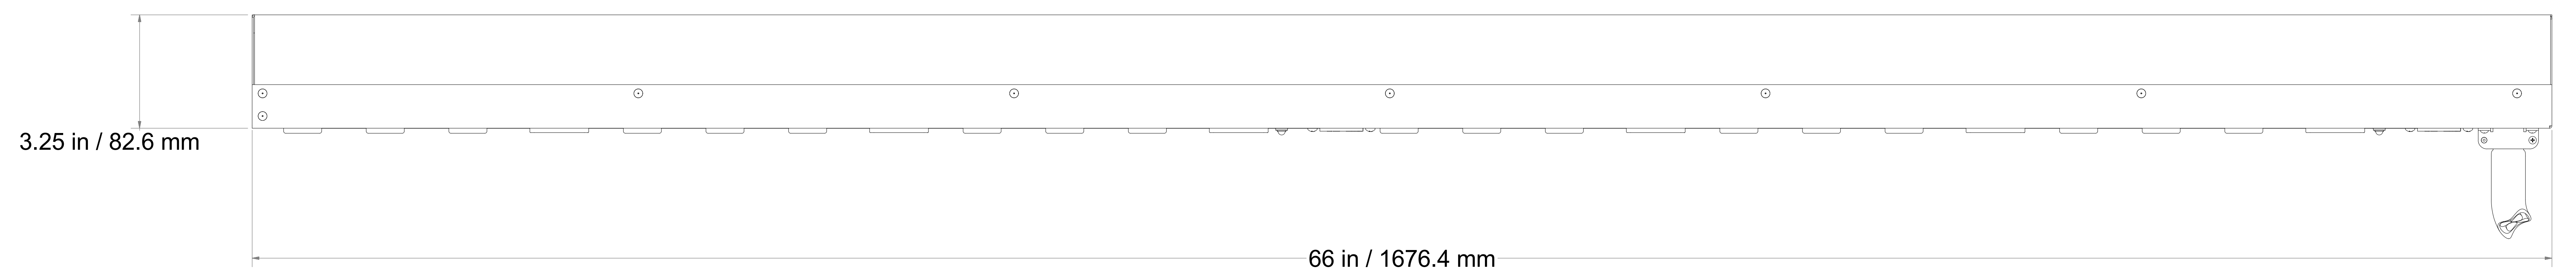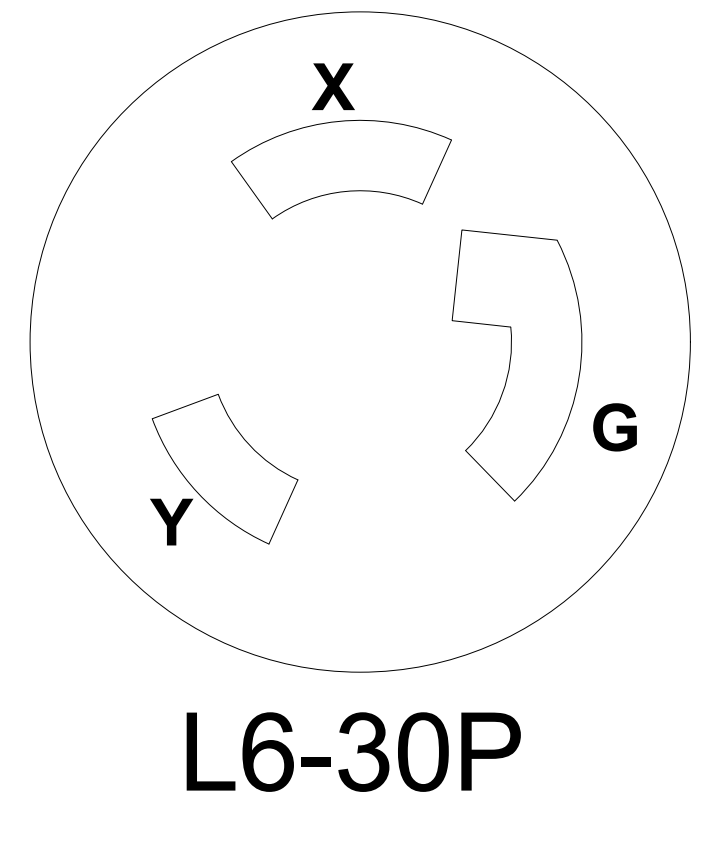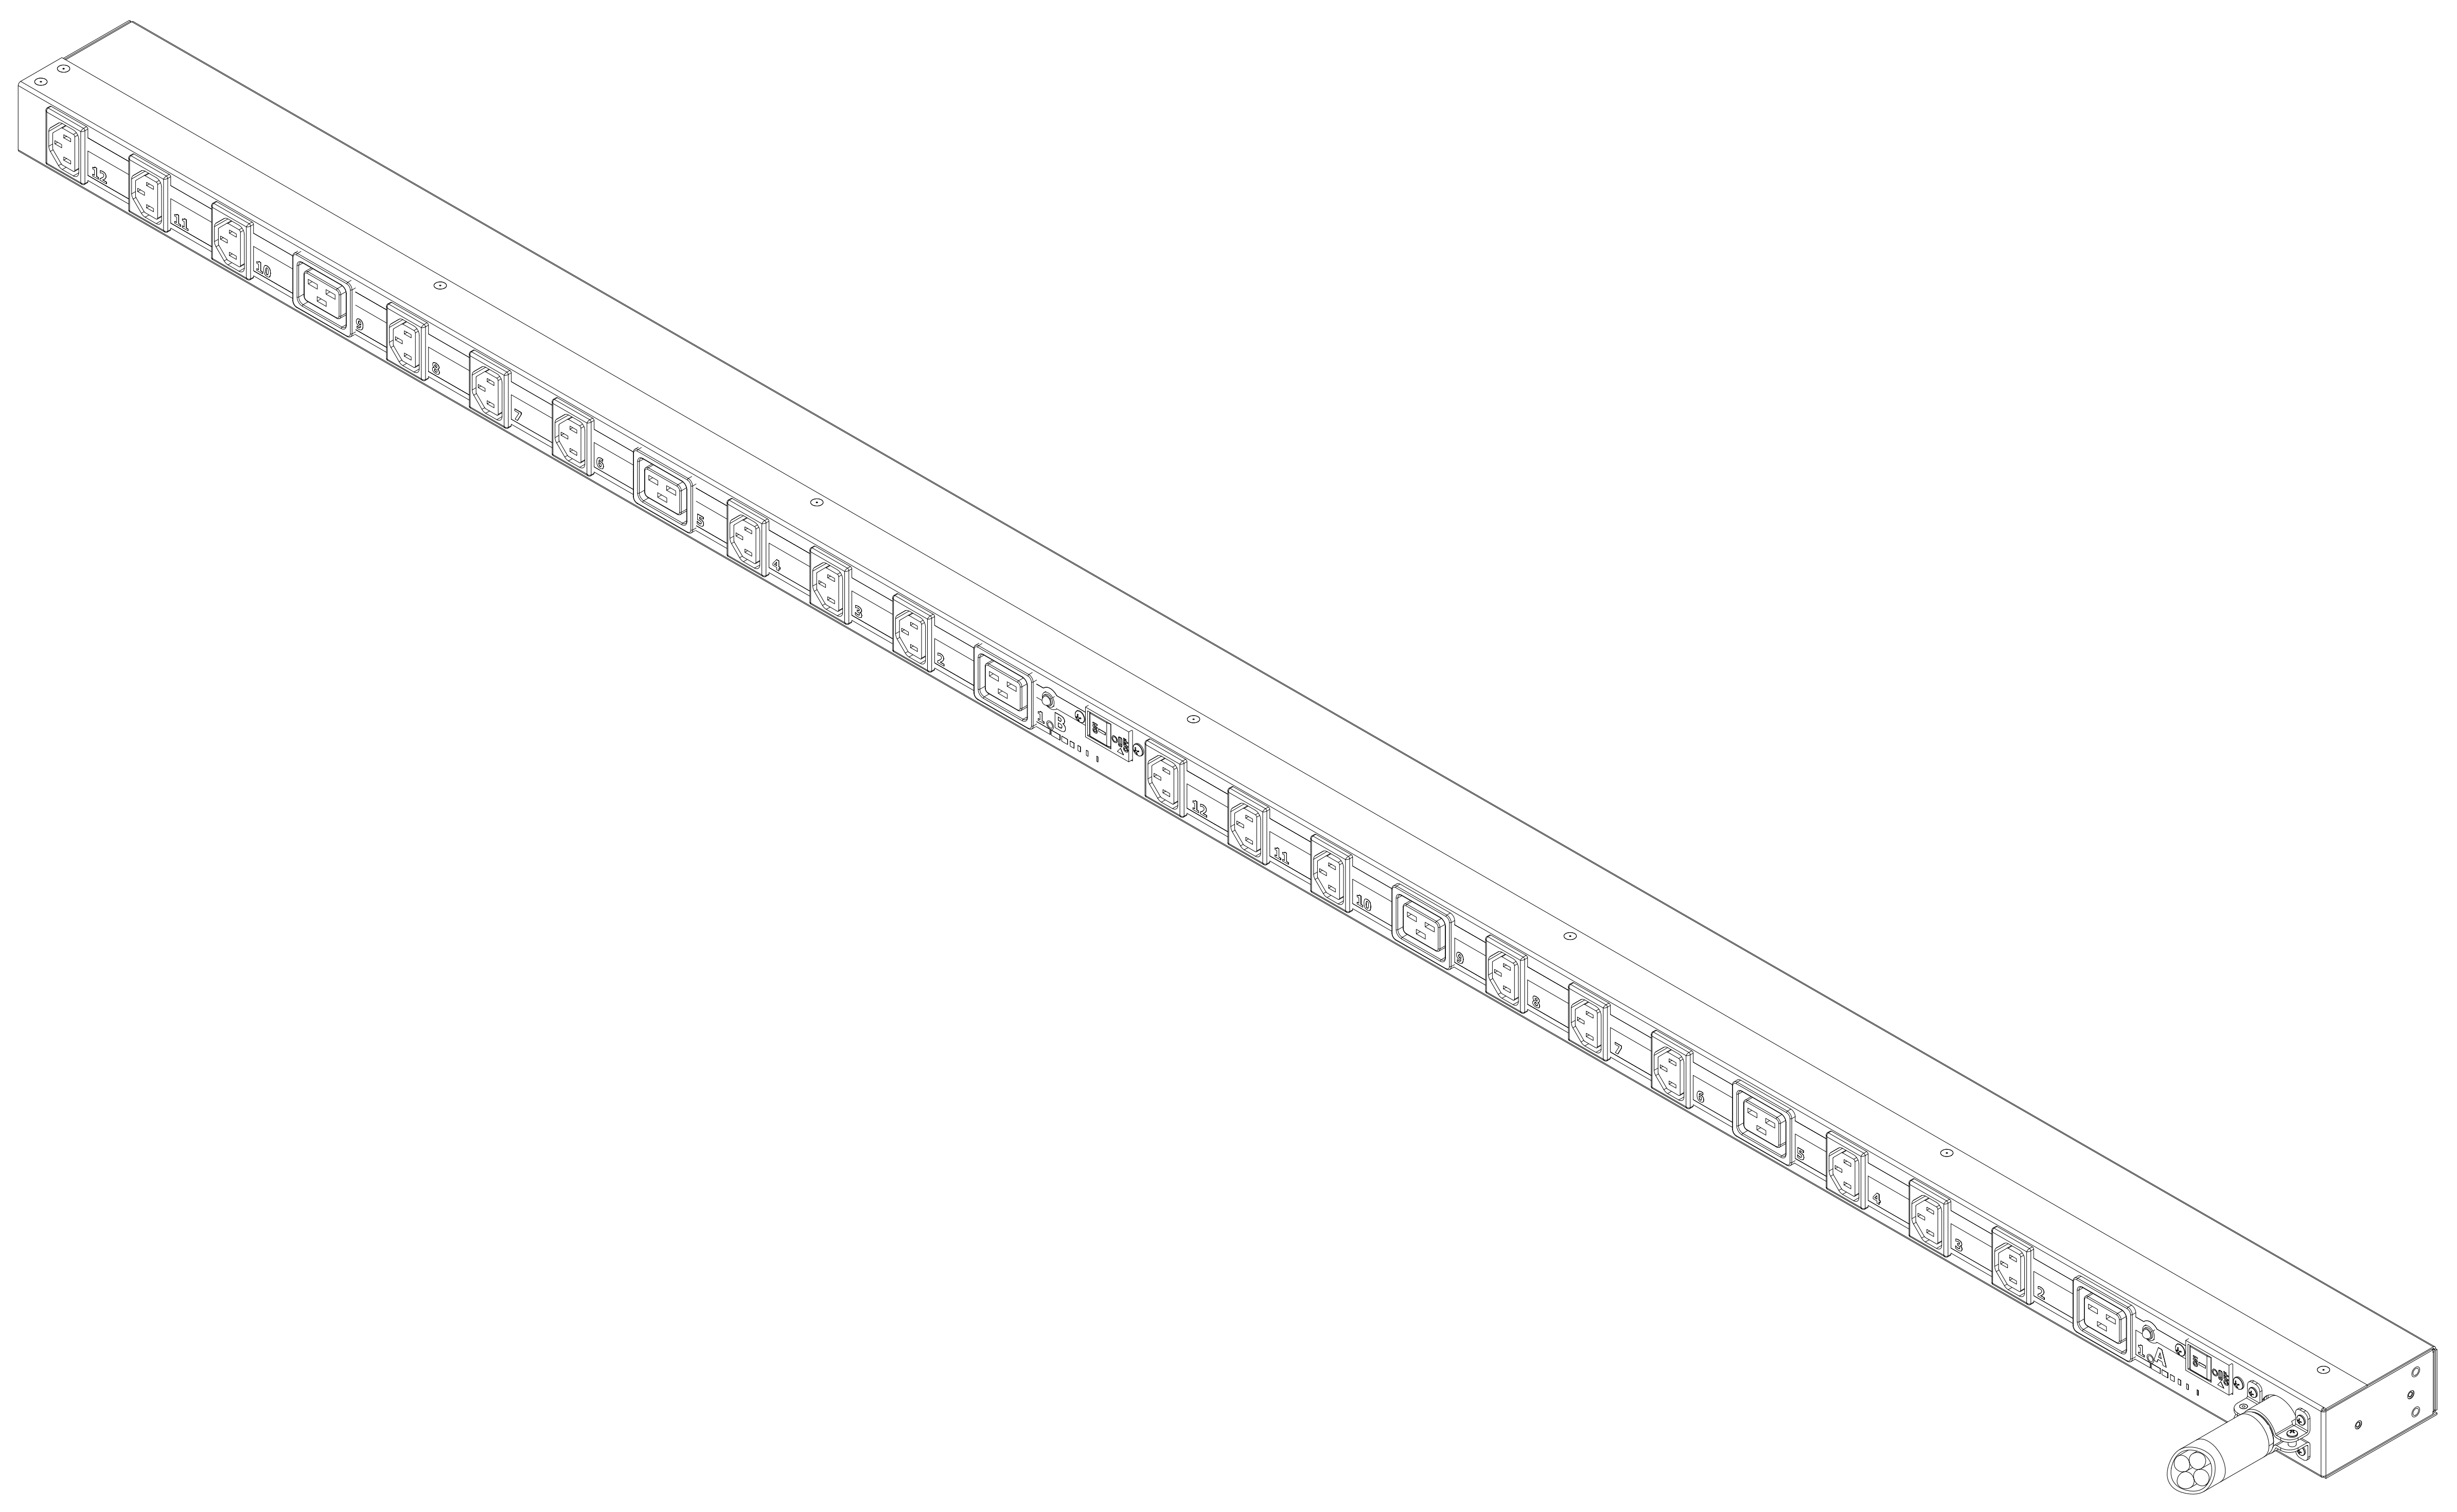

000772-SPMS  
CHANGE NOTICE

00 REV

DRAWINGS IN ACCORDANCE WITH STANDARD ANSI Y14.5M-1994

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS COPYRIGHTED, EXCEPT WITH THE WRITTEN PERMISSION OF SPECTRUM CONTROL, INC. OR ITS SUBSIDIARIES, SUCH INFORMATION SHALL NOT BE PUBLISHED OR DISCLOSED TO OTHERS, OR USED FOR ANY PURPOSE AND THIS DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.

TOLERANCES UNLESS OTHERWISE SPECIFIED:  
FRACTIONS ±1/64  
DECIMAL .XX ± .020  
DECIMAL .XXX ±.010  
ANGLES ± 0'30'

THIRD ANGLE PROJECTION

**Spectrum  
POWER  
Management Systems**

18X C13, 6X C19, 0U PDU

**72A-130BMXGN-10**

DRAWN: CarrS	DATE 4/30/2008	SHEET: 1 OF 1	CODE IDENT NO:	STATE COLLEGE, PENNSYLVANIA
-----------------	-------------------	------------------	----------------	--------------------------------