

A. Input Characteristics:

- 1) Voltage: 200-240V
- 2) Frequency: 50/60 Hz.
- 3) Current: 24A Maximum
- 4) Load Capacity: 14.400 KVA Total Between Both Groups
- 5) Overload Protection: (4) 2P/20A & (2) 1P/20A UL489 Circuit Breakers
- 6) Power Cord: 3' (.914m), 10/3 cord
- 7) Connector: Side A = L6-30P, Side B = L14-30P

B. Output Characteristics:

- 1) Voltage: 120VAC NEMA 5-20R, 240VAC IEC C19
- 2) Current: 24A (Total Connected Load) Per Power Group
- 3) Outlets: 4 IEC C19, 2X NEMA 5-20R

C. Mechanical Characteristics:

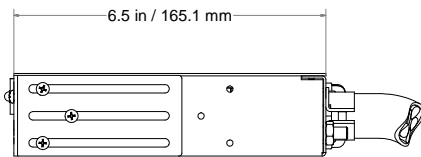
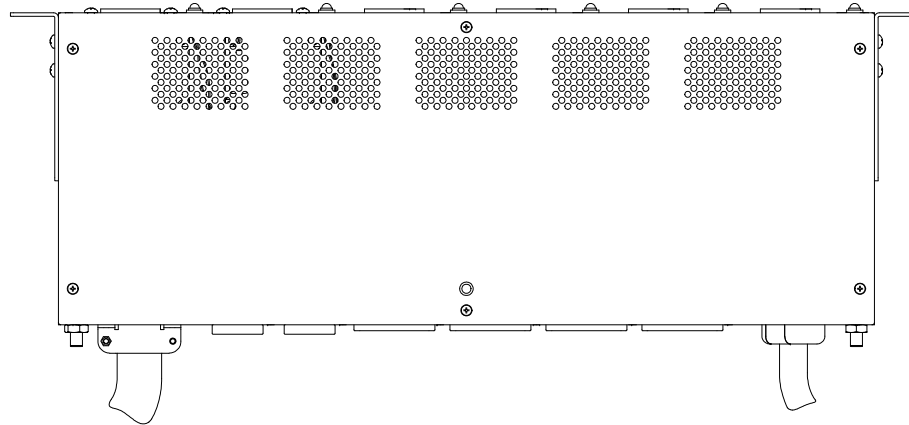
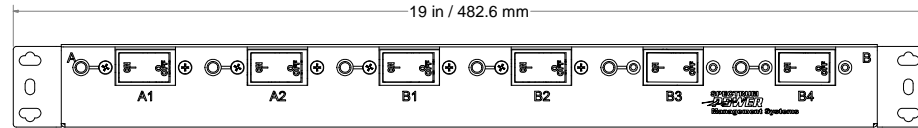
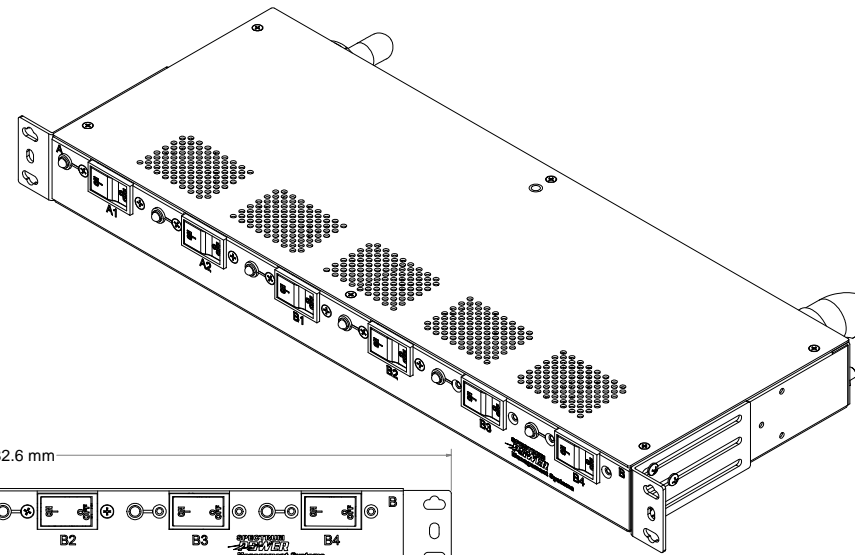
- 1) Material: CRS/G40 Galv. Coating
- 2) Finish: Powder Coat, Black, Fine Texture
- 3) Lettering: Silk-Screen, White/Epoxy
- 4) Storage Temp.: (-25) - 149C (-25 - 65C)



D. Operating Environment:

- 1) Temperature: 32 - 122F (0 - 50C)
- 2) Relative Humidity: 0 - 95% (Non-Condensing)
- 3) Elevation: 0 - 10,000FT (0 - 3000 m)

E. Regulatory Conformance:

- 1) Safety Agency: UL/cUL, FCC 15 Class A, UL60950-1
- 2) RoHS: Compliant to Directive 2002/95/EC



1 CHANGE NOTICE	DRAWINGS IN ACCORDANCE WITH STANDARD ANSI Y14.5M-1994 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS COPYRIGHTED. EXCEPT WITH THE WRITTEN PERMISSION OF SPECTRUM CONTROL, INC. OR ITS SUBSIDIARIES, SUCH INFORMATION SHALL NOT BE PUBLISHED OR DISCLOSED TO OTHERS, OR USED FOR ANY PURPOSE AND THIS DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.	TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONS ±1/64 DECIMAL .XX ± .020 DECIMAL .XXX ±.010 ANGLES ± 0°30'	 THIRD ANGLE PROJECTION	 Spectrum POWER Management Systems
	1RU, 208VAC DUAL 1/P 72RA260BVFFN-00			
	DRAWN: DeVierR	DATE 5/22/2009	SHEET: 1 OF 1	CODE IDENT NO: